


**Product Details**

**B504 Non-Trapped Body**

**Technical Data**

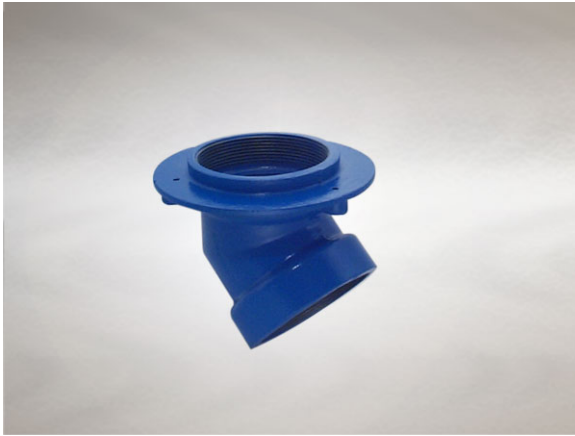

**Dimensions:**

188 dia. body

162 - Height below Body Flange

-15 to 5 - add to overall grating/cover height for min/max height between body flange and FFL

162 - depth body flange to outlet center line

**Connection** - female 4" BSP threaded connection (100mm)

**Free Area** - 78cm<sup>2</sup>

**Materials** - Cast iron, lacquered

**Weight** - 3.5 kg

**General Description:**

Cast Iron B series Vari-Level Non-Trapped Body (45° Threaded Outlet), with 4" BSP dia. 45° outlet. B Series Vari-Level gullies are suited for a wide range of applications.

**Options:**

To specify an option, add option letter(s) as a suffix to the Spec. Code

C.B - membrane clamping collar

**Materials:**

**Cast Iron - BS EN 1561:** Used for bodies, membrane clamping collars, spigot adaptors and accessories such as extensions. A widely used metal in the drainage industry, its resistance to corrosion permits extended use under extreme conditions. Castings are coated with a high grade lacquer paint to provide internal and external surface coverage. Paint will gradually wear off and is replaceable; oxidation (surface rusting) is a natural process which does not weaken the material. A zinc anti-corrosion coating is applied to certain castings by sherardizing.

All dimensions are in millimetres unless stated. In line with general practice all dimensions shown are nominal.

Wade International

Third Avenue, Halstead, Essex, CO9 2SX.

Telephone: +44 (0)1787 475151


Fax: +44 (0)1787 475579

e-mail: [wadetech@alumascwms.co.uk](mailto:wadetech@alumascwms.co.uk)

website: <https://www.alumascwms.co.uk/brands/wade/>

**Typical Installation for B504:**

Note: This illustration may show a similar Wade Product - it is intended to show the general installation type only.

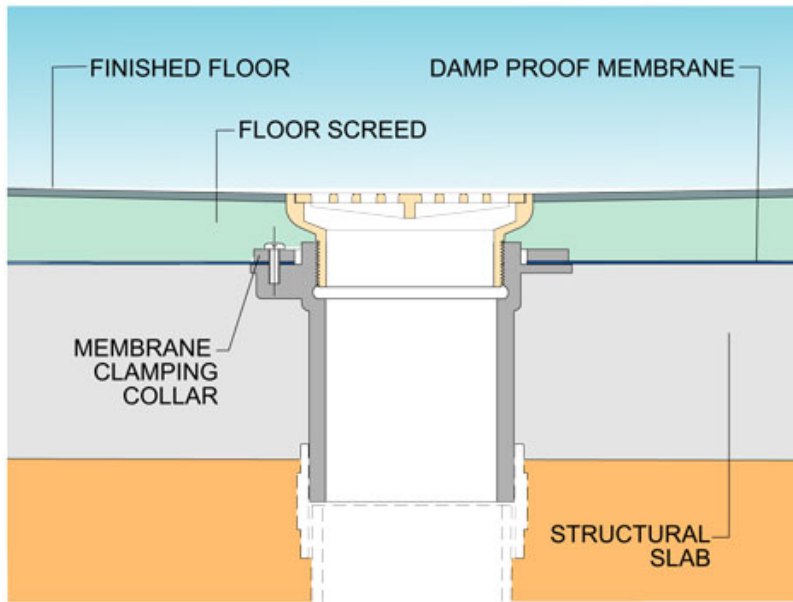

**Dimensioned Section for B504:**

