Product Details

D702 Non-Trapped Body   **Technical Data**

Dimensions:
265 dia. body
127 - Height below Body Flange
-30 to 10 - add to overall grating/cover height for min/max height between body flange and FFL
86 - depth body flange to outlet center line
Connection - female 2" BSP threaded connection (50mm)
Free Area - 19cm²
Materials - Cast iron, lacquered
Weight - 7 kg
Note: Membrane clamping collar C.D also required if using with a Vari-Level top (C.M1 with Multi-Level). (priced separately from body)

General Description:
Cast Iron D series Vari-Level Non-Trapped Body (Horizontal Threaded Outlet - Shallow Sump), with 2" BSP dia. horizontal outlet. D Series Vari-Level gullies are suited for a wide range of applications.

Options:
To specify an option, add option letter(s) as a suffix to the Spec. Code
W - weepholes (provide supplementary drainage at membrane level) - add suffix "W" to membrane clamping collar spec. code

Materials:
Cast Iron - BS EN 1561: Used for bodies, membrane clamping collars, spigot adaptors and accessories such as extensions. A widely used metal in the drainage industry, its resistance to corrosion permits extended use under extreme conditions. Castings are coated with a high grade lacquer paint to provide internal and external surface coverage. Paint will gradually wear off and is replaceable; oxidisation (surface rusting) is a natural process which does not weaken the material. A zinc anti-corrosion coating is applied to certain castings by sherardizing.

All dimensions are in millimetres unless stated. In line with general practice all dimensions shown are nominal.
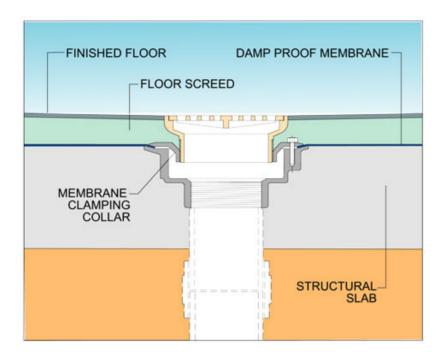
Typical Installation for D702:

Note: This illustration may show a similar Wade Product - it is intended to show the general installation type only.

Dimensioned Section for D702: