

Product Details

GP1104 'P' Trapped Body

Technical Data



Dimensions:

206 x 237 body
202 - Height below Body Flange
0 to 10 - add to overall grating/cover height for min/max height between body flange and FFL
71 - depth body flange to outlet center line

Connection - 110mm Plastic, 100mm DIN19522 / 4" BS416 / Harmer SML

Free Area - 67cm²

Materials - ABS / polycarbonate alloy

Weight - 0.6 kg

Note: If a vari-level extension is required, the UP104 plastic version must be used - cast iron versions are not compatible. (priced separately from body)

General Description:

ABS GP series Vari-Level 'P' Trapped Body (with Optional Side Inlets), with 110.2 dia. horizontal outlet. GP series Vari-Level trapped gullies with 50mm water seal, are compact, suitable for finished floor areas where limited space is available for a gully. Side inlets are achieved by knock-outs, which are easily removed on site.

Options:

To specify an option, add option letter(s) as a suffix to the Spec. Code
W - weepholes (provide supplementary drainage at membrane level)

Materials:

ABS: Used for bodies, dip tubes, extensions and spigot adaptors. A cost effective, fire resistant material.

Polycarbonate: Used for domes. A polycarbonate/ABS blend which offers durability, high impact strength and long-term resistance to ultraviolet light.

All dimensions are in millimetres unless stated. In line with general practice all dimensions shown are nominal.

Wade International

Third Avenue, Halstead, Essex, CO9 2SX.

Telephone: +44 (0)1787 475151


Fax: +44 (0)1787 475579

e-mail: wadetech@alumascwms.co.uk

website: <https://www.alumascwms.co.uk/brands/wade/>

Typical Installation for GP1104:

Note: This illustration may show a similar Wade Product - it is intended to show the general installation type only.

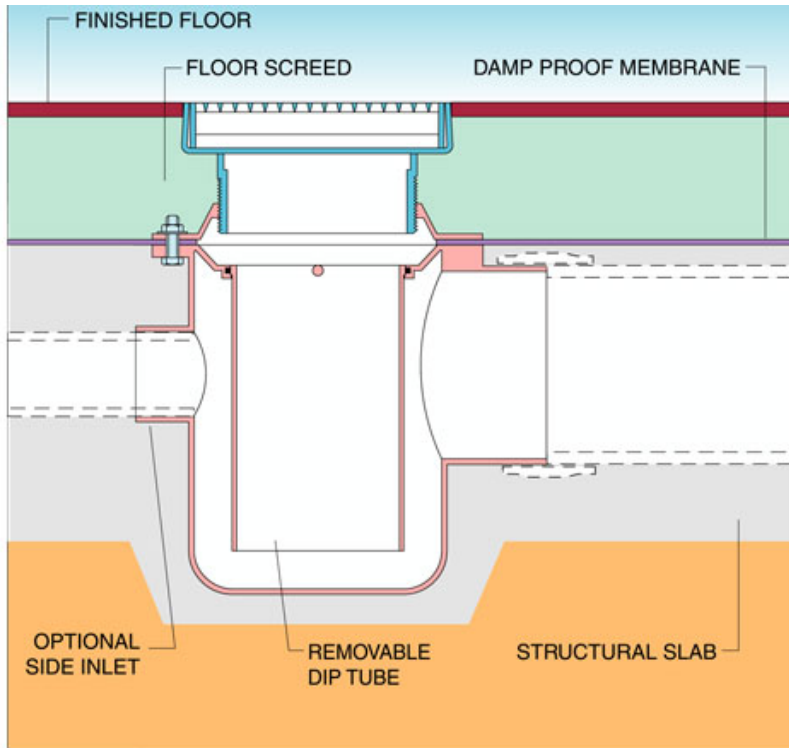

Dimensioned Section for GP1104:

