

Product Details

GP312 'P' Trapped Body Assembly

Technical Data



Dimensions:

220 dia. body

105 - Height below Body Flange

-5 to 10 - add to overall grating/cover height for min/max height between body flange and FFL

105 - depth body flange to outlet center line

Connection - 50mm solvent weld plastic socket (2")

Free Area - 14cm²

Materials - ABS

Weight - 0.6 kg

Note: If a vari-level extension is required, the UP104 plastic version must be used - cast iron versions are not compatible. (priced separately from body)

General Description:

ABS GP series Vari-Level 'P' Trapped Body Assembly, with 2" Socket BS 5255 dia. horizontal outlet. GP series Vari-Level trapped gullies with 50mm water seal, are very compact, suitable for finished floor areas where limited space is available for a gully.

Options:

To specify an option, add option letter(s) as a suffix to the Spec. Code

W - weepholes (provide supplementary drainage at membrane level)

Materials:

ABS: Used for bodies, dip tubes, extensions and spigot adaptors. A cost effective, fire resistant material.

All dimensions are in millimetres unless stated. In line with general practice all dimensions shown are nominal.

Wade International

Third Avenue, Halstead, Essex, CO9 2SX.

Telephone: +44 (0)1787 475151


Fax: +44 (0)1787 475579

e-mail: wadetech@alumascwms.co.uk

website: <https://www.alumascwms.co.uk/brands/wade/>

Typical Installation for GP312:

Note: This illustration may show a similar Wade Product - it is intended to show the general installation type only.

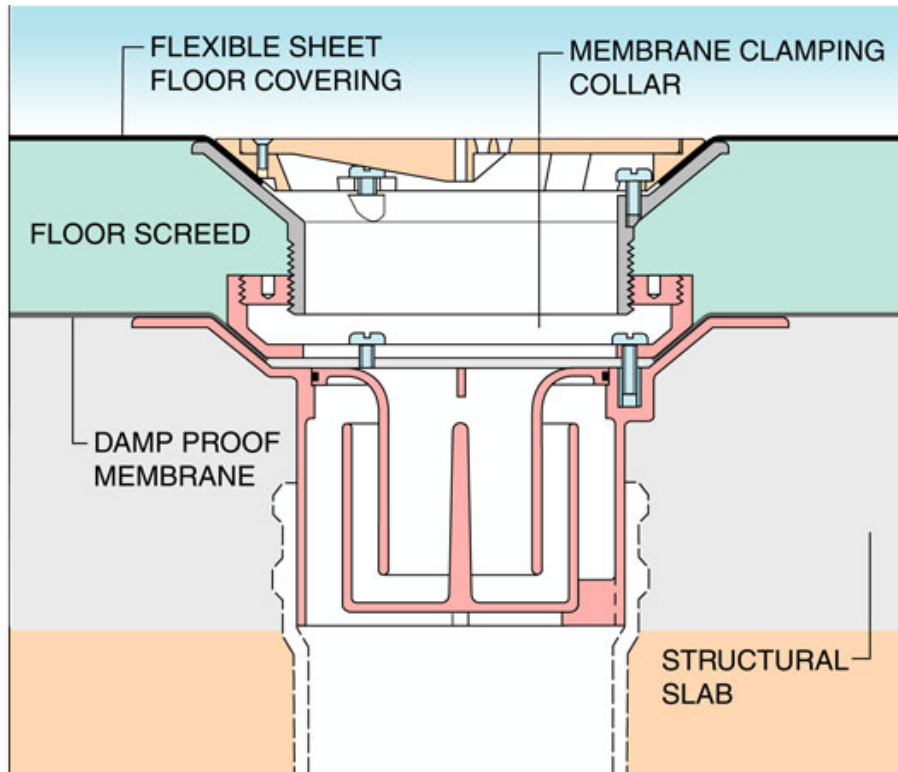

Dimensioned Section for GP312:

