

**Product Details**

**GP614 Trapped Body**

**Technical Data**



**Dimensions:**

220 dia. body

103 - Height below Body Flange

-5 to 10 - add to overall grating/cover height for min/max height between body flange and FFL

**Connection** - 110mm Plastic, 100mm DIN19522 / SML / 4" BS416 & 50mm (2") solvent weld plastic socket

**Free Area** - 14cm<sup>2</sup>

**Materials** - ABS

**Weight** - 0.6 kg

**Note:** If a vari-level extension is required, the UP104 plastic version must be used - cast iron versions are not compatible. (priced separately from body)

**General Description:**

ABS GP series Vari-Level Trapped Body, with 110.2, 2" Socket BS 5255 dia. vertical outlet. GP series Vari-Level trapped gullies with 50mm water seal, are very compact, suitable for finished floor areas where limited space is available for a gully.

**Options:**

To specify an option, add option letter(s) as a suffix to the Spec. Code  
W - weepholes (provide supplementary drainage at membrane level)

**Materials:**

**ABS:** Used for bodies, dip tubes, extensions and spigot adaptors. A cost effective, fire resistant material.

All dimensions are in millimetres unless stated. In line with general practice all dimensions shown are nominal.

Wade International

Third Avenue, Halstead, Essex, CO9 2SX.

Telephone: +44 (0)1787 475151


Fax: +44 (0)1787 475579

e-mail: wadetech@alumascwms.co.uk

website: <https://www.alumascwms.co.uk/brands/wade/>

**Typical Installation for GP614:**

Note: This illustration may show a similar Wade Product - it is intended to show the general installation type only.

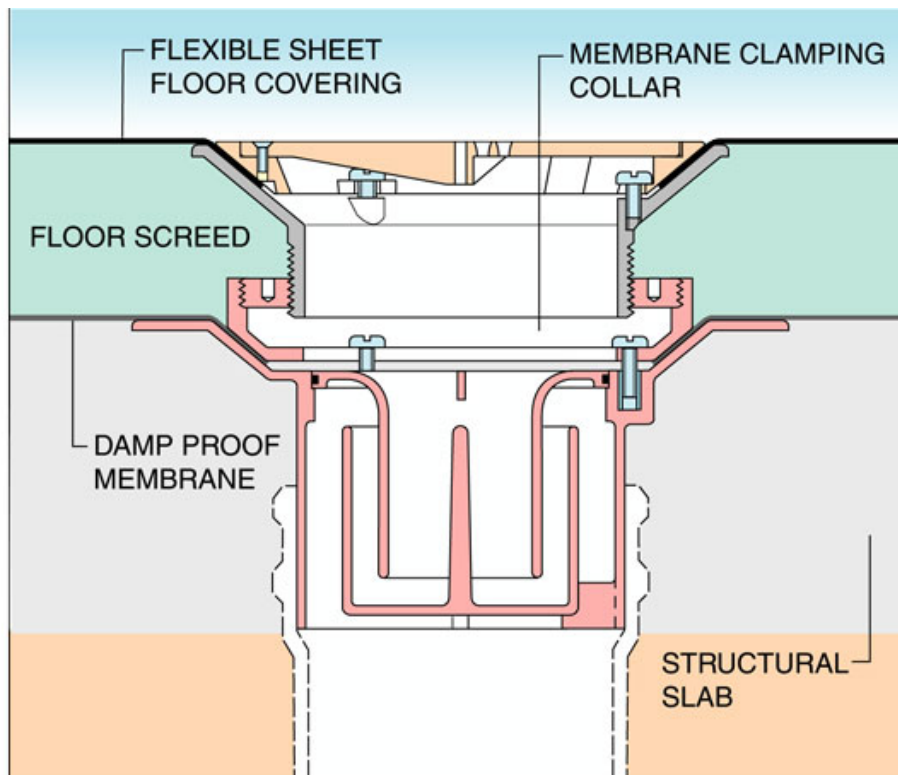

**Dimensioned Section for GP614:**

