

Product Details

J204 'P' Trapped Body

Technical Data



Dimensions:

225 x 405 body
345 - Height below Body Flange
-10 to 10 - add to overall grating/cover height for min/max
height between body flange and FFL
76 - depth body flange to outlet center line

Connection - female 4" BSP threaded connection (100mm)

Free Area - 78cm²

Materials - Cast iron, lacquered

Weight - 19.7 kg

General Description:

Cast Iron J series Vari-Level 'P' Trapped Body (With optional side inlets), with 4" BSP dia. horizontal outlet. Has 100mm water seal and 4" NPSM Vari-Level thread for rodding access cover. Note: close proximity of grating and access cover prevents the adjacent use of the widest versions.

Options:

To specify an option, add option letter(s) as a suffix to the Spec. Code

C.J2 - membrane clamping collar

W - weepholes (provide supplementary drainage at membrane level)

Materials:

Cast Iron - BS EN 1561: Used for bodies, membrane clamping collars, spigot adaptors and accessories such as extensions. A widely used metal in the drainage industry, its resistance to corrosion permits extended use under extreme conditions. Castings are coated with a high grade lacquer paint to provide internal and external surface coverage. Paint will gradually wear off and is replaceable; oxidation (surface rusting) is a natural process which does not weaken the material. A zinc anti-corrosion coating is applied to certain castings by sherardizing.

All dimensions are in millimetres unless stated. In line with general practice all dimensions shown are nominal.

Wade International

Third Avenue, Halstead, Essex, CO9 2SX.

Telephone: +44 (0)1787 475151


Fax: +44 (0)1787 475579

e-mail: wadetech@alumascwms.co.uk

website: <https://www.alumascwms.co.uk/brands/wade/>

Typical Installation for J204:

Note: This illustration may show a similar Wade Product - it is intended to show the general installation type only.

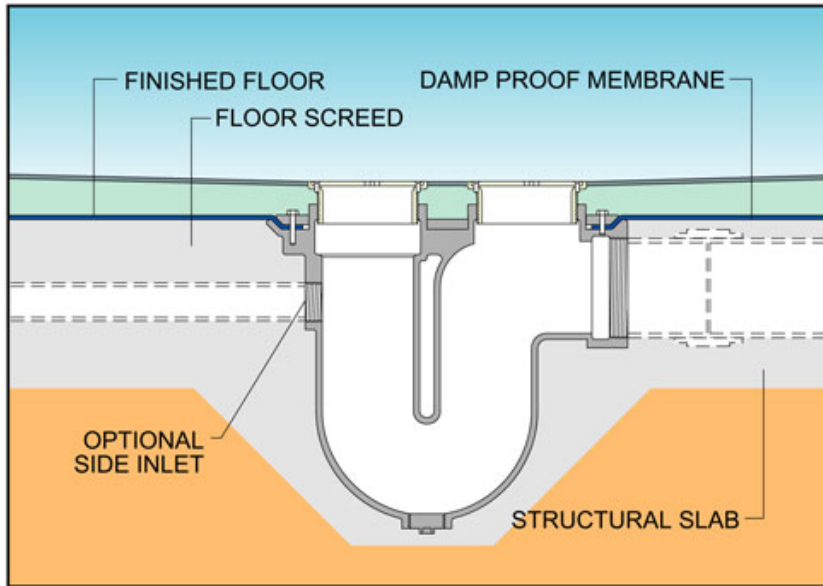

Dimensioned Section for J204:

