

## **Product Details**

## L5103 Access Cover



#### **Technical Data**

### **Dimensions:**

160 square at finish level
54 - Overall Height
54 to 54 - Overall Height
Connection - 4" NPSM Vari-Level thread
Materials - Nickel bronze
Load Rating Class - L15
Weight - 2.7 kg

#### **General Description:**

160 Square Nickel Bronze Vari-Level Access Cover, for use with tiles, marble, terrazzo, resin etc. flooring (Gasketed), with 4" NPSM dia. vertical outlet. Durable, superbly finished items particularly suited to a high volume of pedestrian traffic.

#### **Options:**

To specify an option, add option letter(s) as a suffix to the Spec. Code H - fitted with Pin Torx screws for security applications Tapped 1.25" - cover is tapped 1.25" BSP to provide a direct connection for waste pipes Tapped 2" - cover is tapped 2" BSP to provide a direct connection for waste pipes Tapped 2" - cover is tapped 2" BSP to provide a direct connection for waste pipes Tapped 3" - cover is tapped 3" BSP to provide a direct connection for waste pipes Tapped 4" - cover is tapped 4" BSP to provide a direct connection for waste pipes


#### **Materials:**

Nickel Bronze - BS EN 1982: Used with satin finish for gratings, funnels and access covers. A cast alloy with a fine grain effect which blends well with most floor finishes. The satin finish is generally maintained by the slight abrasive action of passing traffic. In unused areas the material will gradually tarnish. To restore lustre, apply a plain nylon scouring pad (not soap-filled) in the direction of grain.Note: Avoid covering nickel bronze items with plastic sheeting after installation, otherwise blackening may occur.

All dimensions are in millimetres unless stated. In line with general practice all dimensions shown are nominal.

# **Typical Installation for L5103:**

Note: This illustration may show a similar Wade Product - it is intended to show the general installation type only.

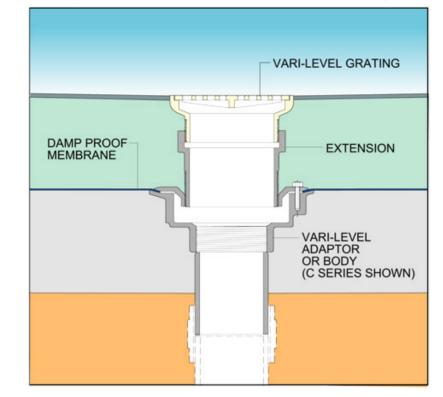

### **Dimensioned Section for L5103:**

