


Product Details

Q302 Non-Trapped Gully Assembly

Technical Data

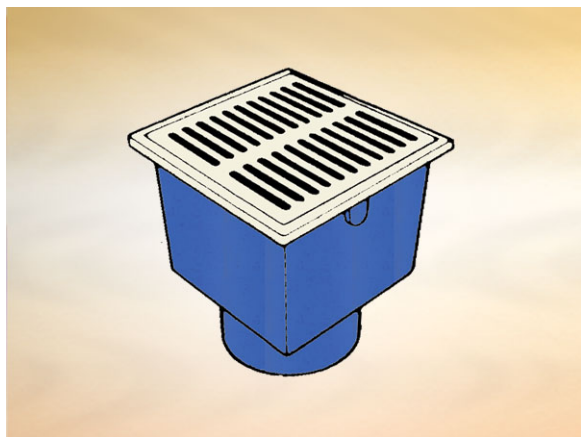

Dimensions:

295 square at finish level

295 square body

289 - Overall Height

Connection - female 4" BSP threaded connection (100mm)

Free Area - body= 78cm², grating= 205cm²

Materials - Body - cast iron, plastic coated; Grating - nickel bronze

Load Rating Class - L15

Weight - 22.4 kg

General Description:

High Capacity Non-Trapped Gully Assembly, for use with tiles, marble, terrazzo, resin etc. flooring, with 4" BSP dia. vertical outlet. For use as a hopper drain, or an indirect waste receiver; for pedestrian traffic only.

Options:

To specify an option, add option letter(s) as a suffix to the Spec. Code

B - filter bucket

D - secondary strainer

F - flange and membrane clamp

Materials:

Cast Iron - BS EN 1561: Used for bodies, membrane clamping collars, spigot adaptors and accessories such as extensions. A widely used metal in the drainage industry, its resistance to corrosion permits extended use under extreme conditions. Castings are coated with a high grade lacquer paint to provide internal and external surface coverage. Paint will gradually wear off and is replaceable; oxidation (surface rusting) is a natural process which does not weaken the material. A zinc anti-corrosion coating is applied to certain castings by sherardizing.

Nickel Bronze - BS EN 1982: Used with satin finish for gratings, funnels and access covers. A cast alloy with a fine grain effect which blends well with most floor finishes. The satin finish is generally maintained by the slight abrasive action of passing traffic. In unused areas the material will gradually tarnish. To restore lustre, apply a plain nylon scouring pad (not soap-filled) in the direction of grain. **Note: Avoid covering nickel bronze items with plastic sheeting after installation, otherwise blackening may occur.**

All dimensions are in millimetres unless stated. In line with general practice all dimensions shown are nominal.

Wade International

Third Avenue, Halstead, Essex, CO9 2SX.

Telephone: +44 (0)1787 475151

Fax: +44 (0)1787 475579

e-mail: wadetech@alumascwms.co.uk

website: <https://www.alumascwms.co.uk/brands/wade/>

Dimensioned Section for Q302:

