


Product Details

Q403 'P' Trapped Gully Assembly

Technical Data

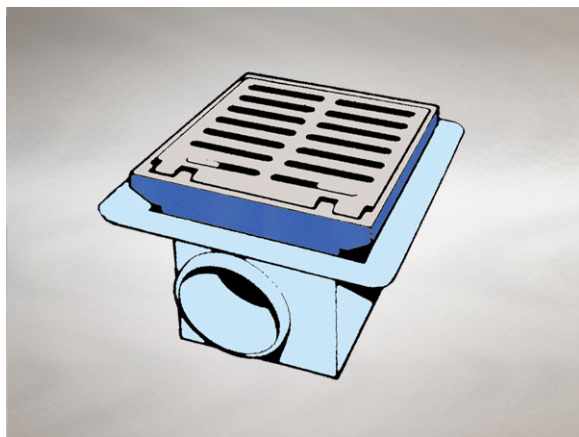

Dimensions:

323 x 316 at finish level
 450 square body
 239 - Height below Body Flange
 41 to 41 - height between body flange and FFL
 86 - depth body flange to outlet center line

Connection - 4" BS416 (100mm) / Harmer SML

Free Area - body= 78cm², grating= 280cm²

Materials - Body - stainless steel; Grating - ductile iron, sherardized

Load Rating Class - M125

Weight - 23 kg

General Description:

High Capacity 'P' Trapped Gully Assembly, for use with unfinished (eg. bare concrete) or paved areas, with 114 dia. horizontal outlet. For use in service and parking areas, factories, warehouses etc. Trapped gully with hinged ductile iron grating and rodding access.

Options:

To specify an option, add option letter(s) as a suffix to the Spec. Code

B - filter bucket

C.Q4 - membrane clamping collar

Materials:

Ductile Iron - BS EN 1563 + 1564: A casting with the ductility of steel, yet with more than twice the tensile strength of cast iron. A zinc anti-corrosion coating is applied by sherardizing.

Stainless Steel - Austenitic Grade 304 (Grade 316 optional on most products): Used for bodies, gratings, funnels, access covers, filter buckets and fixings. A corrosion-resistant metal containing significant amounts of nickel and chromium; AISI grade 304 stainless steel is used as standard, which is suitable for general use in and around buildings including most coastal locations. In applications such as swimming pools or having an aggressive atmosphere, grade 316 is recommended and is available optionally (if available, code 'M' will be listed under 'Options'). An even higher grade may be required for applications in highly corrosive environments including where exposure to seawater may be anticipated. Clean with soap and warm water rinse and wipe dry. Gratings may also be cleaned in certain dishwashers. Under no circumstances treat with metal scouring pads, metal scrapers or wire wool as these will contaminate surfaces leaving rust spots. Take care to cover stainless steel items when site work is going on, to avoid contamination with rust-inducing particles such as when mild steel or cast iron items are being cut.

All dimensions are in millimetres unless stated. In line with general practice all dimensions shown are nominal.

Wade International

Third Avenue, Halstead, Essex, CO9 2SX.

Telephone: +44 (0)1787 475151

Fax: +44 (0)1787 475579

e-mail: wadetech@alumascwms.co.uk

website: <https://www.alumascwms.co.uk/brands/wade/>

Dimensioned Section for Q403:

