

**Product Details**

**Q9233 Grating**

**Technical Data**



**Dimensions:**

192 square at finish level  
5 - grating aperture width  
30 - Overall Height

**Connection** - Q series - 30 deep / 200 square

**Free Area** - 216cm<sup>2</sup>

**Materials** - Stainless steel

**Load Rating Class** - L15

**Weight** - 1 kg

**General Description:**

192 Square Stainless Steel Q series Stainless Steel Gully Grating (Streamline), with 5mm grating aperture width. Heel-proof reverse wedge profile. Also suited for barefoot zones. This grating will fit 200 square stainless steel gullies and 225 square stainless steel gullies for use with sheet floor covering.

**Options:**

To specify an option, add option letter(s) as a suffix to the Spec. Code  
M - grade 316 stainless steel

**Materials:**

**Stainless Steel - Austenitic Grade 304 (Grade 316 optional on most products):** Used for bodies, gratings, funnels, access covers, filter buckets and fixings. A corrosion-resistant metal containing significant amounts of nickel and chromium; AISI grade 304 stainless steel is used as standard, which is suitable for general use in and around buildings including most coastal locations. In applications such as swimming pools or having an aggressive atmosphere, grade 316 is recommended and is available optionally (if available, code 'M' will be listed under 'Options'). An even higher grade may be required for applications in highly corrosive environments including where exposure to seawater may be anticipated. Clean with soap and warm water rinse and wipe dry. Gratings may also be cleaned in certain dishwashers. Under no circumstances treat with metal scouring pads, metal scrapers or wire wool as these will contaminate surfaces leaving rust spots. Take care to cover stainless steel items when site work is going on, to avoid contamination with rust-inducing particles such as when mild steel or cast iron items are being cut.

All dimensions are in millimetres unless stated. In line with general practice all dimensions shown are nominal.

Wade International

Third Avenue, Halstead, Essex, CO9 2SX.

Telephone: +44 (0)1787 475151


Fax: +44 (0)1787 475579

e-mail: [wadetech@alumascwms.co.uk](mailto:wadetech@alumascwms.co.uk)

website: <https://www.alumascwms.co.uk/brands/wade/>

**Typical Installation for Q9233:**

Note: This illustration may show a similar Wade Product - it is intended to show the general installation type only.

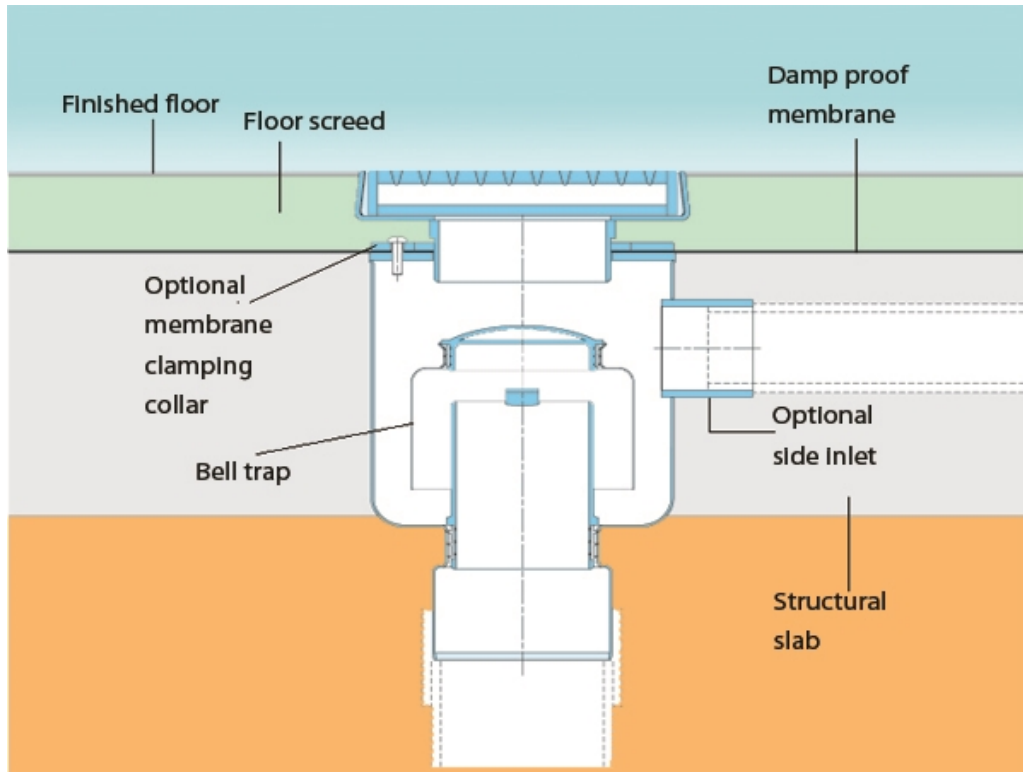

**Dimensioned Section for Q9233:**

