


**Product Details**

**SC23930 Channel Grating**

**Technical Data**

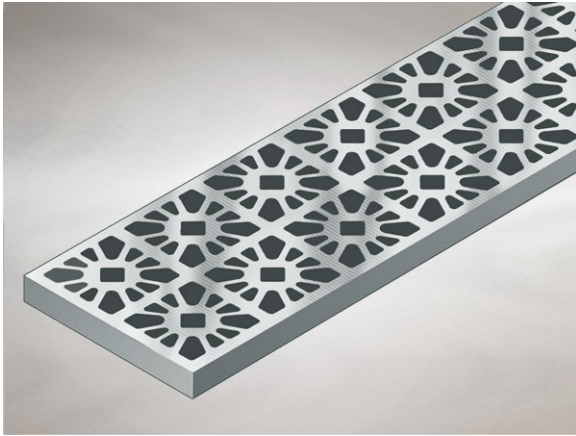

**Dimensions:**

150 x 500 overall size  
15 - grating aperture width  
15 - Depth

**Free Area** - 475 per metre

**Materials** - Cast iron, sherardized

**Load Rating Class** - A15

**Weight** - 3.4 kg

**General Description:**

150 wide x 500 long Cast Iron Floral Channel Grating with 15mm grating aperture width . Robust durable gratings for use in service areas, plant areas etc. and also for restoration or refurbishment projects where there is a requirement to match period architecture. CE marked and type tested to BS EN 1433.

**Options:**

To specify an option, add option letter(s) as a suffix to the Spec. Code

L - secured grating

**Materials:**

**Cast Iron - BS EN 1561:** Used for bodies, membrane clamping collars, spigot adaptors and accessories such as extensions. A widely used metal in the drainage industry, its resistance to corrosion permits extended use under extreme conditions. Castings are coated with a high grade lacquer paint to provide internal and external surface coverage. Paint will gradually wear off and is replaceable; oxidisation (surface rusting) is a natural process which does not weaken the material. A zinc anti-corrosion coating is applied to certain castings by sherardizing.

---

All dimensions are in millimetres unless stated. In line with general practice all dimensions shown are nominal.

Wade International

Third Avenue, Halstead, Essex, CO9 2SX.

Telephone: +44 (0)1787 475151

Fax: +44 (0)1787 475579

e-mail: [wadetech@alumascwms.co.uk](mailto:wadetech@alumascwms.co.uk)

website: <https://www.alumascwms.co.uk/brands/wade/>