

Product Details

G603LD 'S' Trapped Body

Technical Data



Dimensions:

185 x 281 body

170 - Height below Body Flange

Connection - 3" BS416 (75mm) / Harmer SML

Free Area - 44cm²

Materials - Cast iron, lacquered

Weight - 8.4 kg

General Description:

Cast Iron G series 'S' Trapped Body (Version for use with Wade stainless steel drainage channels. With Optional Side Inlets), with 87 dia. vertical outlet. G series trapped gullies with 50mm water seal. Body inlet is machined to accept a standard 114 diameter channel outlet spigot and is supplied with membrane clamping collar and a neoprene o-ring to give a watertight joint.

Options:

To specify an option, add option letter(s) as a suffix to the Spec. Code
W - weepholes (provide supplementary drainage at membrane level)

Materials:

Cast Iron - BS EN 1561: Used for bodies, membrane clamping collars, spigot adaptors and accessories such as extensions. A widely used metal in the drainage industry, its resistance to corrosion permits extended use under extreme conditions. Castings are coated with a high grade lacquer paint to provide internal and external surface coverage. Paint will gradually wear off and is replaceable; oxidation (surface rusting) is a natural process which does not weaken the material. A zinc anti-corrosion coating is applied to certain castings by sherardizing.

All dimensions are in millimetres unless stated. In line with general practice all dimensions shown are nominal.

Wade International

Third Avenue, Halstead, Essex, CO9 2SX.

Telephone: +44 (0)1787 475151


Fax: +44 (0)1787 475579

e-mail: wadetech@alumascwms.co.uk


website: <https://www.alumascwms.co.uk/brands/wade/>

Typical Installation for G603LD:

Note: This illustration may show a similar Wade Product - it is intended to show the general installation type only.

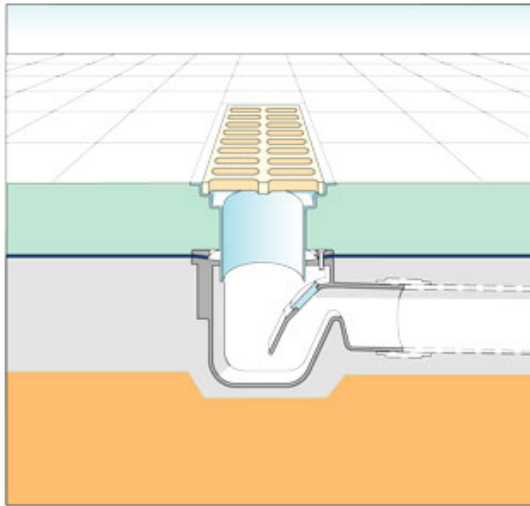

With 'P' trapped body.

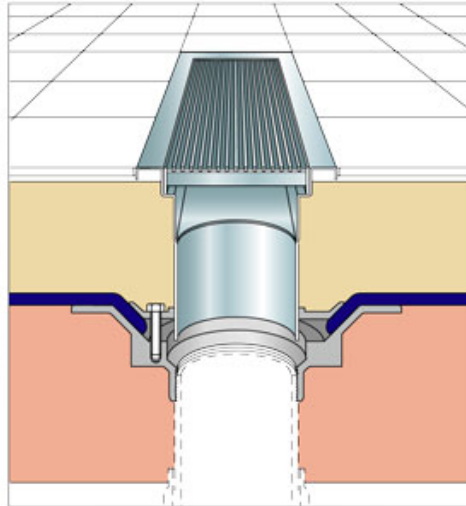

With non-trapped body.

Dimensioned Section for G603LD:

