


Product Details

S4800 Channel and Grating

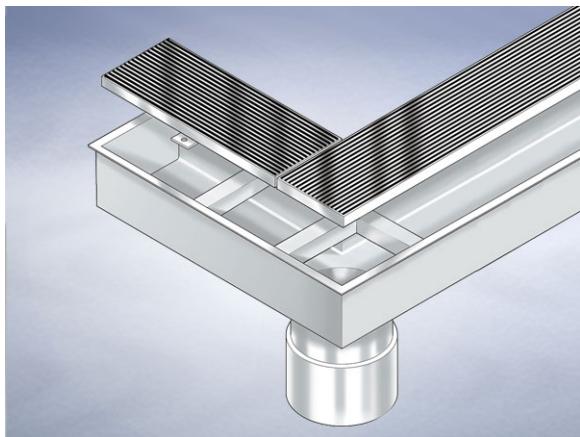

Technical Data

Dimensions:

178 overall size

-

Materials - Stainless steel

Load Rating Class - A15

General Description:

Stainless Steel Fire-Fighting Lift Channel and Grating (SS3135A5 5mm slot 'Streamline' gratings are secured in the channel leaving a peripheral slot 10mm wide, to help prevent water bridging the grating). To prevent water, such as from a sprinkler, entering a lift well. Channel has two 150mm outlets in corner locations, to deal with flow of 25 l/s in accordance with BS 9999.

Materials:

Stainless Steel - Austenitic Grade 304 (Grade 316 optional on most products): Used for bodies, gratings, funnels, access covers, filter buckets and fixings. A corrosion-resistant metal containing significant amounts of nickel and chromium; AISI grade 304 stainless steel is used as standard, which is suitable for general use in and around buildings including most coastal locations. In applications such as swimming pools or having an aggressive atmosphere, grade 316 is recommended and is available optionally (if available, code 'M' will be listed under 'Options'). An even higher grade may be required for applications in highly corrosive environments including where exposure to seawater may be anticipated. Clean with soap and warm water rinse and wipe dry. Gratings may also be cleaned in certain dishwashers. Under no circumstances treat with metal scouring pads, metal scrapers or wire wool as these will contaminate surfaces leaving rust spots. Take care to cover stainless steel items when site work is going on, to avoid contamination with rust-inducing particles such as when mild steel or cast iron items are being cut.

All dimensions are in millimetres unless stated. In line with general practice all dimensions shown are nominal.

Wade International

Third Avenue, Halstead, Essex, CO9 2SX.

Telephone: +44 (0)1787 475151 Fax: +44 (0)1787 475579

e-mail: wadetech@alumascwms.co.uk website: <https://www.alumascwms.co.uk/brands/wade/>

Dimensioned Section for S4800:

