


## Product Details

### WC303 Outlet with Circular Flat Grating

### Technical Data

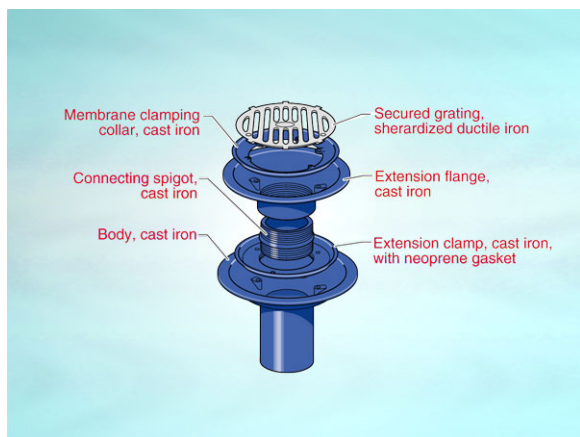

#### Dimensions:

220 dia. at finish level

305 dia. body

165 - Height below Body Flange

80 to 100 - min/max height between roof deck and membrane level

**Connection** - 3" BS416 (75mm) / Harmer SML

**Free Area** - body= 44cm<sup>2</sup>, grating= 130cm<sup>2</sup>

**Materials** - Grating - ductile iron, sherardized; Body - cast iron, lacquered; Membrane Clamp - cast iron, lacquered

**Load Rating Class** - L15

**Weight** - 11 kg

#### General Description:

220 Dia. Cast Iron 3400 series (Medium Sump) Warm Roof Outlet with Circular Flat Grating, for use with asphalt / composition finish, with 87 dia. vertical outlet. For other thicknesses of insulation, please contact our Technical Services Dept.

#### Options:

To specify an option, add option letter(s) as a suffix to the Spec. Code

K - bonded insulation jacket

Z - rigid PVC flange for use with PVC single ply membranes

#### Materials:

**Cast Iron - BS EN 1561:** Used for bodies, membrane clamping collars, spigot adaptors and accessories such as extensions. A widely used metal in the drainage industry, its resistance to corrosion permits extended use under extreme conditions. Castings are coated with a high grade lacquer paint to provide internal and external surface coverage. Paint will gradually wear off and is replaceable; oxidation (surface rusting) is a natural process which does not weaken the material. A zinc anti-corrosion coating is applied to certain castings by sherardizing.

**Ductile Iron - BS EN 1563 + 1564:** A casting with the ductility of steel, yet with more than twice the tensile strength of cast iron. A zinc anti-corrosion coating is applied by sherardizing.

All dimensions are in millimetres unless stated. In line with general practice all dimensions shown are nominal.

Wade International

Third Avenue, Halstead, Essex, CO9 2SX.

Telephone: +44 (0)1787 475151


Fax: +44 (0)1787 475579

e-mail: wadetech@alumascwms.co.uk


website: <https://www.alumascwms.co.uk/brands/wade/>

### Typical Installation for WC303:

Note: This illustration may show a similar Wade Product - it is intended to show the general installation type only.

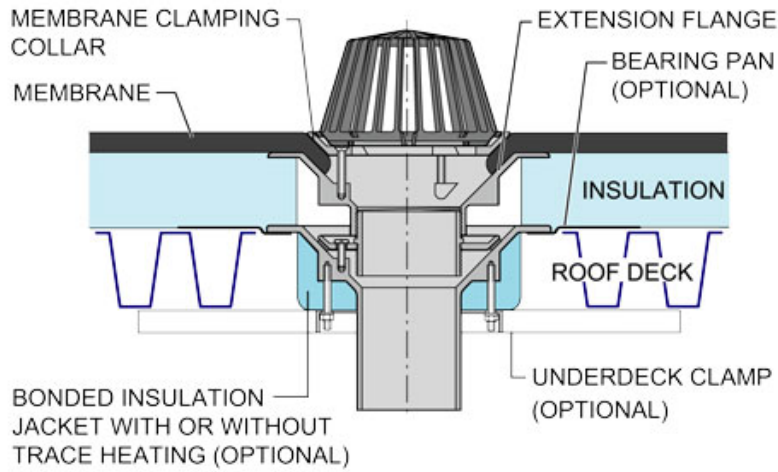

### Dimensioned Section for WC303:

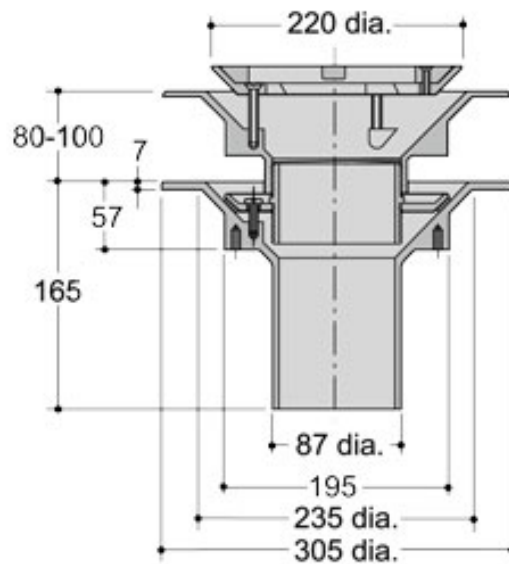

**Flow Performance Figures for WC303:**

| Head of water at outlet                                   | 15mm | 20mm | 25mm | 30mm | 35mm | 40mm | 50mm |
|-----------------------------------------------------------|------|------|------|------|------|------|------|
| Flow Rate (l/s):                                          | 2.28 | 3.29 | 4.1  | 4.24 | 4.29 | 4.31 | 4.45 |
| Roof area drained (m²) at 0.021 l/s per m² rainfall rate: | 109  | 157  | 195  | 202  | 204  | 205  | 212  |

**Note:** Flow rates of Wade roof outlets have been established by full-scale tests. The values shown in the table are 75% of such tests. The design of the layout of roof outlets should be in accordance with the recommendations given in BS EN 12056:3.