


Product Details

WD333 Outlet with Square Flat Grating

Technical Data

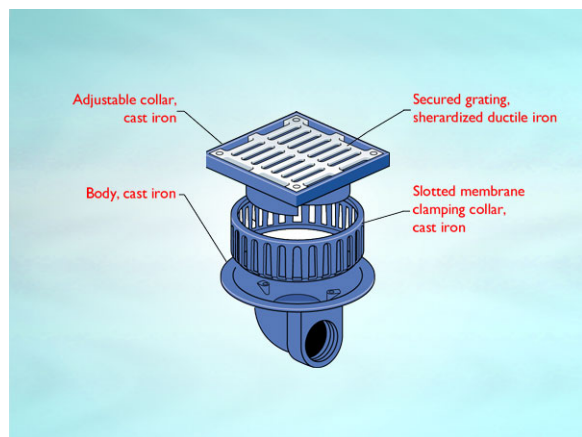

Dimensions:

224 square at finish level
 305 dia. body
 119 - Height below Body Flange
 94 to 121 - min/max height between membrane level and top of grating
 68 - depth body flange to outlet center line
Connection - female 3" BSP threaded connection (75mm)
Free Area - body= 44cm², grating= 170cm²
Materials - Grating - cast iron, sherardized; Body - cast iron, lacquered; Membrane Clamp - cast iron, lacquered
Load Rating Class - L15
Weight - 14.4 kg

General Description:

224 Square Cast Iron 3410 series (Medium Sump) No Fines Screed / Inverted Roof Outlet with Square Flat Grating, for use with unfinished (eg. bare concrete) or paved areas, with 3" BSP dia. horizontal outlet.

Options:

To specify an option, add option letter(s) as a suffix to the Spec. Code

K - bonded insulation jacket

Z - rigid PVC flange for use with PVC single ply membranes

Materials:

Cast Iron - BS EN 1561: Used for bodies, membrane clamping collars, spigot adaptors and accessories such as extensions. A widely used metal in the drainage industry, its resistance to corrosion permits extended use under extreme conditions. Castings are coated with a high grade lacquer paint to provide internal and external surface coverage. Paint will gradually wear off and is replaceable; oxidation (surface rusting) is a natural process which does not weaken the material. A zinc anti-corrosion coating is applied to certain castings by sherardizing.

All dimensions are in millimetres unless stated. In line with general practice all dimensions shown are nominal.

Wade International

Third Avenue, Halstead, Essex, CO9 2SX.

Telephone: +44 (0)1787 475151


Fax: +44 (0)1787 475579

e-mail: wadetech@alumascwms.co.uk


website: <https://www.alumascwms.co.uk/brands/wade/>

Typical Installation for WD333:

Note: This illustration may show a similar Wade Product - it is intended to show the general installation type only.

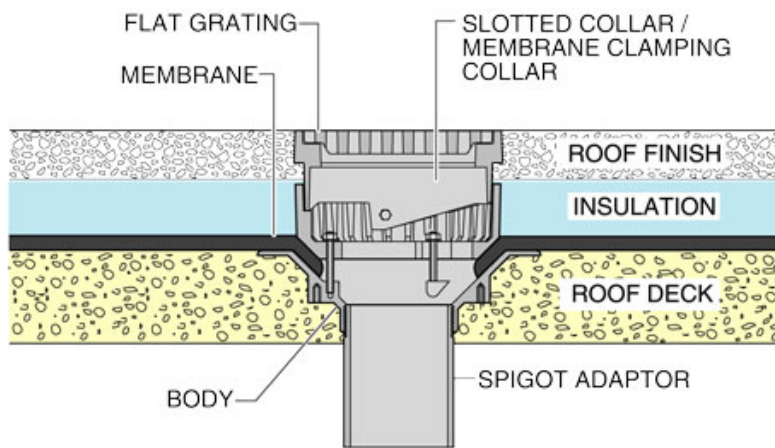

Dimensioned Section for WD333:

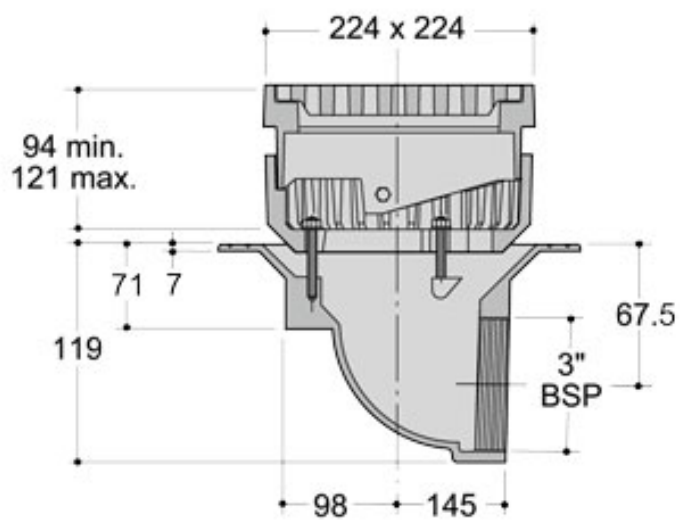

Flow Performance Figures for WD333:

Head of water at outlet	15mm	20mm	25mm	30mm	35mm	40mm	50mm
Flow Rate (l/s):	2.07	3.09	4.04	4.52	4.73	4.86	5.25
Roof area drained (m²) at 0.021 l/s per m² rainfall rate:	99	147	192	215	225	231	250

Note: Flow rates of Wade roof outlets have been established by full-scale tests. The values shown in the table are 75% of such tests. The design of the layout of roof outlets should be in accordance with the recommendations given in BS EN 12056:3.