


**Product Details**

**F306 Non-Trapped Gully Assembly**

**Technical Data**

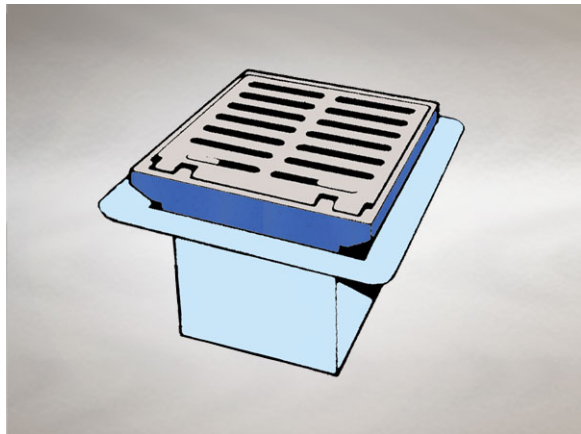

**Dimensions:**

325 x 318 at finish level  
 450 square body  
 275 - Height below Body Flange  
 46 to 82 - min/max height between top of grating and body flange

**Connection** - 6" BS416, 150mm DIN19522 / Harmer SML

**Free Area** - body= 176cm<sup>2</sup>, grating= 280cm<sup>2</sup>

**Materials** - Body - stainless steel; Grating - ductile iron, sherardized

**Load Rating Class** - M125

**Weight** - 24.7 kg

**General Description:**

325 x 318 Stainless Steel F series Multi-Level Non-Trapped Gully Assembly, for use with unfinished (eg. bare concrete) or paved areas, with 162 dia. vertical outlet. F Series Multi-Level gullies with hinged grating are suited for use in warehouses, plant rooms, yards, car parks etc.

**Options:**

To specify an option, add option letter(s) as a suffix to the Spec. Code

B - silt bucket

T - stainless steel bell trap

C.F3 - membrane clamping collar (order as separate code)

**Materials:**

**Ductile Iron - BS EN 1563 + 1564:** A casting with the ductility of steel, yet with more than twice the tensile strength of cast iron. A zinc anti-corrosion coating is applied by sherardizing.

**Stainless Steel - Austenitic Grade 304 (Grade 316 optional on most products):** Used for bodies, gratings, funnels, access covers, filter buckets and fixings. A corrosion-resistant metal containing significant amounts of nickel and chromium; AISI grade 304 stainless steel is used as standard, which is suitable for general use in and around buildings including most coastal locations. In applications such as swimming pools or having an aggressive atmosphere, grade 316 is recommended and is available optionally (if available, code 'M' will be listed under 'Options'). An even higher grade may be required for applications in highly corrosive environments including where exposure to seawater may be anticipated. Clean with soap and warm water rinse and wipe dry. Gratings may also be cleaned in certain dishwashers. Under no circumstances treat with metal scouring pads, metal scrapers or wire wool as these will contaminate surfaces leaving rust spots. Take care to cover stainless steel items when site work is going on, to avoid contamination with rust-inducing particles such as when mild steel or cast iron items are being cut.

All dimensions are in millimetres unless stated. In line with general practice all dimensions shown are nominal.

Wade International

Third Avenue, Halstead, Essex, CO9 2SX.

Telephone: +44 (0)1787 475151


Fax: +44 (0)1787 475579

e-mail: wadetech@alumascwms.co.uk

website: <https://www.alumascwms.co.uk/brands/wade/>

**Typical Installation for F306:**

Note: This illustration may show a similar Wade Product - it is intended to show the general installation type only.

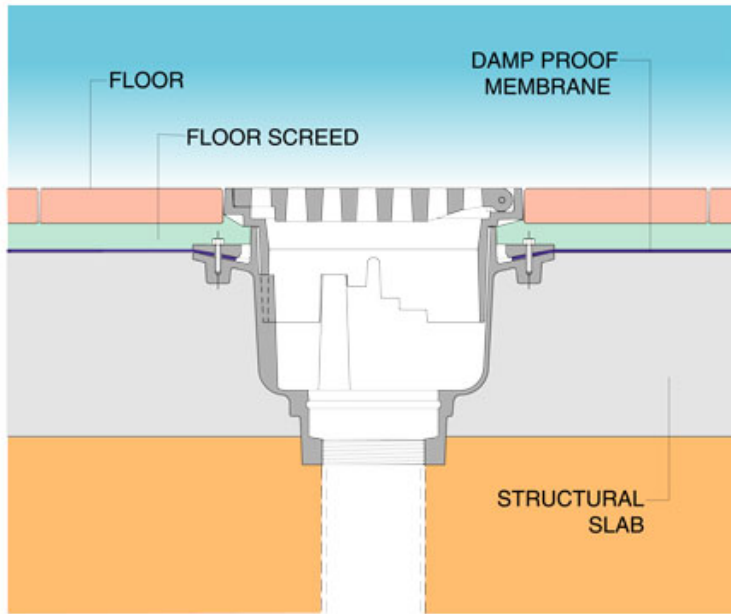

**Dimensioned Section for F306:**

