

Product Details

L2402 Contoured Grating

Technical Data

**Dimensions:**

115 square at finish level
6 - grating aperture width
58 - Overall Height

Connection - 3" NPSM Vari-Level thread

Free Area - 32cm²

Materials - Nickel bronze

Load Rating Class - L15

Weight - 1.5 kg

General Description:

115 Square Nickel Bronze Vari-Level Contoured Grating, for use with tiles, marble, terrazzo, resin etc. flooring (Providing drainage in a run of tile channel - matches Johnson 4200 tile), with 3" NPSM dia. vertical outlet with 6mm grating aperture width. Durable, superbly finished items particularly suited to a high volume of pedestrian traffic.

Options:

To specify an option, add option letter(s) as a suffix to the Spec. Code

H - fitted with Pin Torx screws for security applications

Materials:

Nickel Bronze - BS EN 1982: Used with satin finish for gratings, funnels and access covers. A cast alloy with a fine grain effect which blends well with most floor finishes. The satin finish is generally maintained by the slight abrasive action of passing traffic. In unused areas the material will gradually tarnish. To restore lustre, apply a plain nylon scouring pad (not soap-filled) in the direction of grain. **Note: Avoid covering nickel bronze items with plastic sheeting after installation, otherwise blackening may occur.**

All dimensions are in millimetres unless stated. In line with general practice all dimensions shown are nominal.

Wade International

Third Avenue, Halstead, Essex, CO9 2SX.

Telephone: +44 (0)1787 475151


Fax: +44 (0)1787 475579

e-mail: wadetech@alumascwms.co.uk

website: <https://www.alumascwms.co.uk/brands/wade/>

Typical Installation for L2402:

Note: This illustration may show a similar Wade Product - it is intended to show the general installation type only.

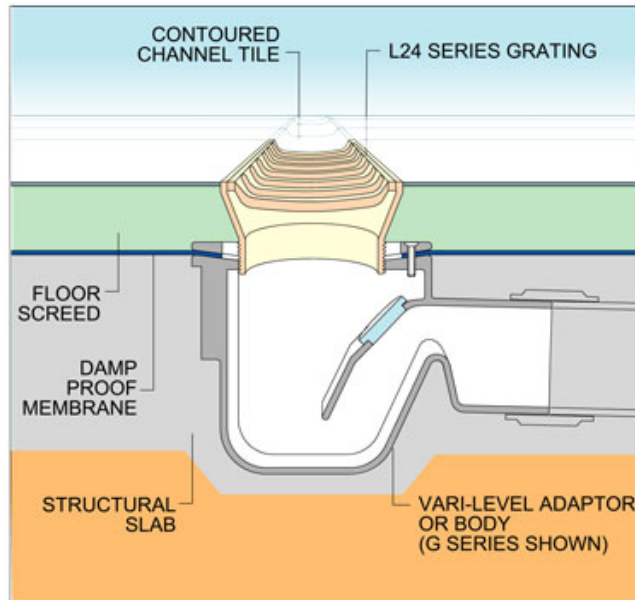

Dimensioned Section for L2402:

