


Product Details

Q501 'P' Trapped Gully Assembly

Technical Data

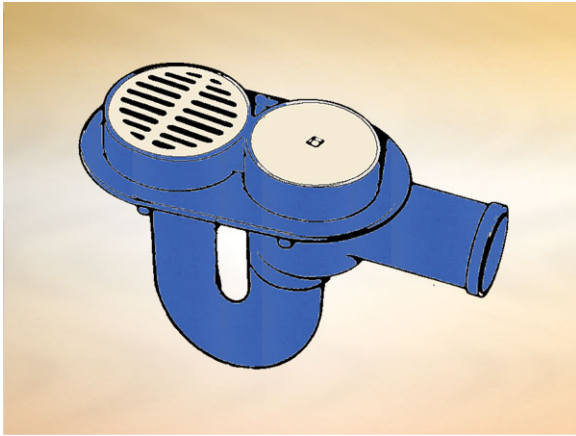

Dimensions:

209 dia. at finish level

633 x 300 body

355 - Height below Body Flange

50 to 50 - height between body flange and FFL

78 - depth body flange to outlet center line

Connection - 4" BS437 (100mm) / Harmer SML

Free Area - body= 76cm², grating= 125cm²

Materials - Body - cast iron, lacquered; Grating - nickel bronze; Access Cover - nickel bronze

Load Rating Class - L15

Weight - 40 kg

General Description:

High Capacity 'P' Trapped Gully Assembly, for use with tiles, marble, terrazzo, resin etc. flooring, with 117 dia. horizontal outlet. For use where a trapped side outlet is required in pedestrian traffic areas.

Options:

To specify an option, add option letter(s) as a suffix to the Spec. Code

B - filter bucket

C.Q5 - membrane clamping collar

V - backwater valve

Materials:

Cast Iron - BS EN 1561: Used for bodies, membrane clamping collars, spigot adaptors and accessories such as extensions. A widely used metal in the drainage industry, its resistance to corrosion permits extended use under extreme conditions. Castings are coated with a high grade lacquer paint to provide internal and external surface coverage. Paint will gradually wear off and is replaceable; oxidation (surface rusting) is a natural process which does not weaken the material. A zinc anti-corrosion coating is applied to certain castings by sherardizing.

Nickel Bronze - BS EN 1982: Used with satin finish for gratings, funnels and access covers. A cast alloy with a fine grain effect which blends well with most floor finishes. The satin finish is generally maintained by the slight abrasive action of passing traffic. In unused areas the material will gradually tarnish. To restore lustre, apply a plain nylon scouring pad (not soap-filled) in the direction of grain. **Note: Avoid covering nickel bronze items with plastic sheeting after installation, otherwise blackening may occur.**

All dimensions are in millimetres unless stated. In line with general practice all dimensions shown are nominal.

Wade International

Third Avenue, Halstead, Essex, CO9 2SX.

Telephone: +44 (0)1787 475151

Fax: +44 (0)1787 475579

e-mail: wadetech@alumascwms.co.uk

website: <https://www.alumascwms.co.uk/brands/wade/>

Dimensioned Section for Q501:

