


Product Details

SC11430 Channel Grating

Technical Data

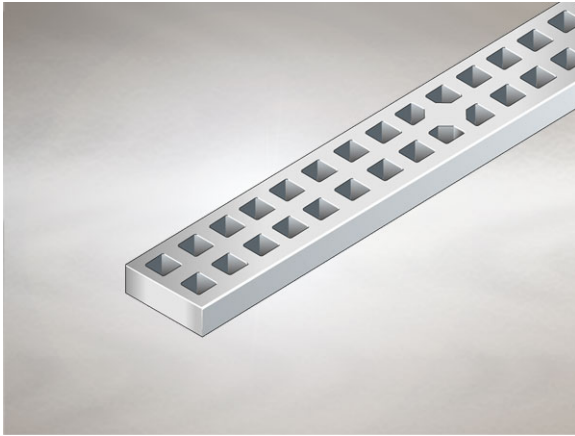

Dimensions:

60 x 500 overall size
16 - grating aperture width
15 - Depth

Free Area - 184 per metre

Materials - Cast iron, sherardized

Load Rating Class - B125

Weight - 2.3 kg

General Description:

60 wide x 500 long Cast Iron Standard Slot Channel Grating with 16mm grating aperture width . Robust durable gratings for use in service areas, plant areas etc. and also for restoration or refurbishment projects where there is a requirement to match period architecture. CE marked and type tested to BS EN 1433.

Options:

To specify an option, add option letter(s) as a suffix to the Spec. Code

L - secured grating

Materials:

Cast Iron - BS EN 1561: Used for bodies, membrane clamping collars, spigot adaptors and accessories such as extensions. A widely used metal in the drainage industry, its resistance to corrosion permits extended use under extreme conditions. Castings are coated with a high grade lacquer paint to provide internal and external surface coverage. Paint will gradually wear off and is replaceable; oxidation (surface rusting) is a natural process which does not weaken the material. A zinc anti-corrosion coating is applied to certain castings by sherardizing.

All dimensions are in millimetres unless stated. In line with general practice all dimensions shown are nominal.

Wade International

Third Avenue, Halstead, Essex, CO9 2SX.

Telephone: +44 (0)1787 475151

Fax: +44 (0)1787 475579

e-mail: wadetech@alumascwms.co.uk

website: <https://www.alumascwms.co.uk/brands/wade/>