

Product Details

K5203 Access Cover



Technical Data

Dimensions:

152 dia. at finish level 53 - Overall Height Connection - 4" NPSM Vari-Level thread Materials - Nickel bronze Load Rating Class - L15 Weight - 2 kg

General Description:

152 Dia. Nickel Bronze Vari-Level Access Cover, for use with tiles, marble, terrazzo, resin etc. flooring (Gasketed), with 4" NPSM dia. vertical outlet. Durable, superbly finished items particularly suited to a high volume of pedestrian traffic.

Options:

To specify an option, add option letter(s) as a suffix to the Spec. Code H - fitted with Pin Torx screws for security applications Tapped 1.25" - cover is tapped 1.25" BSP to provide a direct connection for waste pipes Tapped 1.5" - cover is tapped 1.5" BSP to provide a direct connection for waste pipes Tapped 2" - cover is tapped 2" BSP to provide a direct connection for waste pipes


Materials:

Nickel Bronze - BS EN 1982: Used with satin finish for gratings, funnels and access covers. A cast alloy with a fine grain effect which blends well with most floor finishes. The satin finish is generally maintained by the slight abrasive action of passing traffic. In unused areas the material will gradually tarnish. To restore lustre, apply a plain nylon scouring pad (not soap-filled) in the direction of grain.Note: Avoid covering nickel bronze items with plastic sheeting after installation, otherwise blackening may occur.

All dimensions are in millimetres unless stated. In line with general practice all dimensions shown are nominal.

Typical Installation for K5203:

Note: This illustration may show a similar Wade Product - it is intended to show the general installation type only.

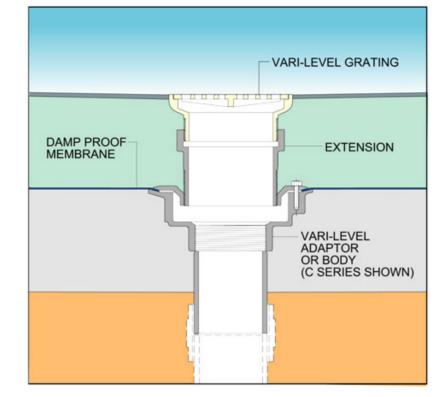

Dimensioned Section for K5203:

