

## Product Details

### GV5103 'P' Trapped Shower Gully Assembly



## Technical Data

### Dimensions:

160 dia. at finish level

220 dia. body

6 - grating aperture width

105 - Height below Body Flange

105 - depth body flange to outlet invert

**Connection** - 50mm solvent weld plastic socket (2")

**Free Area** - 14cm<sup>2</sup>

**Materials** - Grating, clamping collar - nickel bronze; Body, dip tube, bucket - plastic (ABS)

**Load Rating Class** - L15

**Weight** - 1.5 kg

### General Description:

160 Dia. Nickel Bronze 'P' Trapped Shower Gully Assembly, for use with flexible sheet floor covering (eg. vinyl) (2" socket outlet.), with 2" Socket BS 5255 dia. horizontal outlet with 6mm grating aperture width . GV5103 is a compact, lightweight, "trapped gully with peripheral slot drainage for use in shower areas decked with flexible sheet floor covering such as vinyl, up to 3.5mm thickness.

### Options:

To specify an option, add option letter(s) as a suffix to the Spec. Code

H - fitted with Pin Torx screws for security applications

### Materials:

**ABS:** Used for bodies, dip tubes, extensions and spigot adaptors. A cost effective, fire resistant material.

**Nickel Bronze - BS EN 1982:** Used with satin finish for gratings, funnels and access covers. A cast alloy with a fine grain effect which blends well with most floor finishes. The satin finish is generally maintained by the slight abrasive action of passing traffic. In unused areas the material will gradually tarnish. To restore lustre, apply a plain nylon scouring pad (not soap-filled) in the direction of grain.**Note: Avoid covering nickel bronze items with plastic sheeting after installation, otherwise blackening may occur.**

All dimensions are in millimetres unless stated. In line with general practice all dimensions shown are nominal.

Wade International


Third Avenue, Halstead, Essex, CO9 2SX.

Telephone: +44 (0)1787 475151      Fax: +44 (0)1787 475579

e-mail: [wadetech@alumascwms.co.uk](mailto:wadetech@alumascwms.co.uk)      website: <https://www.alumascwms.co.uk/brands/wade/>

**Typical Installation for GV5103:**

Note: This illustration may show a similar Wade Product - it is intended to show the general installation type only.

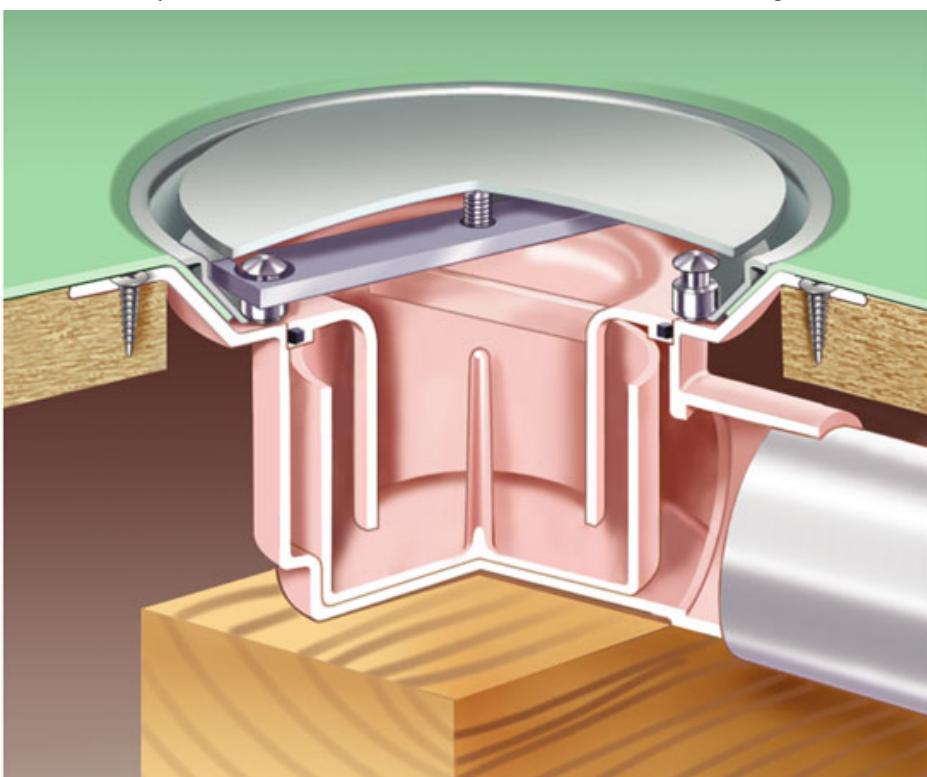

**Dimensioned Section for GV5103:**

