

Quality Drainage Products

Product Details

SVFE Channel



Technical Data

Dimensions:

Materials - Stainless steel

General Description:

Stainless Steel Sheet Vinyl Flooring Channel (Has extended flange with fixing holes, for use on a timber deck.). Stainless steel clamp ensures watertight connection, access to channel and outlet is easily achieved without disturbing the floor covering. Note: Minimum grating width for use with a SVFE channel is 80mm.


Materials:

Stainless Steel - Austenitic Grade 304 (Grade 316 optional on most products): Used for bodies, gratings, funnels, access covers, filter buckets and fixings. A corrosion-resistant metal containing significant amounts of nickel and chromium; AISI grade 304 stainless steel is used as standard, which is suitable for general use in and around buildings including most coastal locations. In applications such as swimming pools or having an aggressive atmosphere, grade 316 is recommended and is available optionally (if available, code 'M' will be listed under 'Options'). An even higher grade may be required for applications in highly corrosive environments including where exposure to seawater may be anticipated. Clean with soap and warm water rinse and wipe dry. Gratings may also be cleaned in certain dishwashers. Under no circumstances treat with metal scouring pads, metal scrapers or wire wool as these will contaminate surfaces leaving rust spots. Take care to cover stainless steel items when site work is going on, to avoid contamination with rust-inducing particles such as when mild steel or cast iron items are being cut.

All dimensions are in millimetres unless stated. In line with general practice all dimensions shown are nominal.

Typical Installation for SVFE:

Note: This illustration may show a similar Wade Product - it is intended to show the general installation type only.

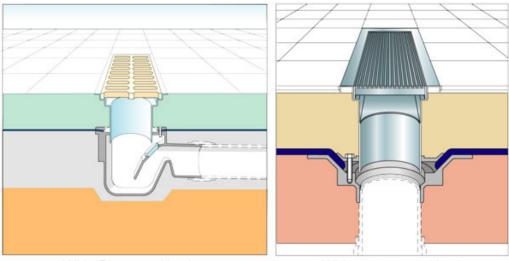

With 'P' trapped body.

With non-trapped body.

Dimensioned Section for SVFE:

